

# FK-216D



## Basic information

### Model FK-216D

Operating weight:

**16000 kg**

Gradeability:

**30%**

Rated power:

**118KW**

Rolling width:

**2130mm**

Activating force



**305/165 KN**

Rated rotary speed:

**2000r/min**



## Outline

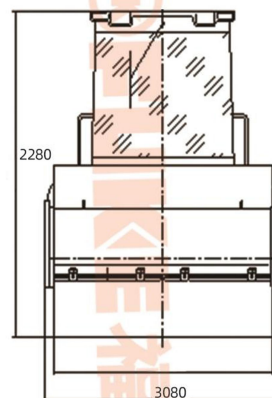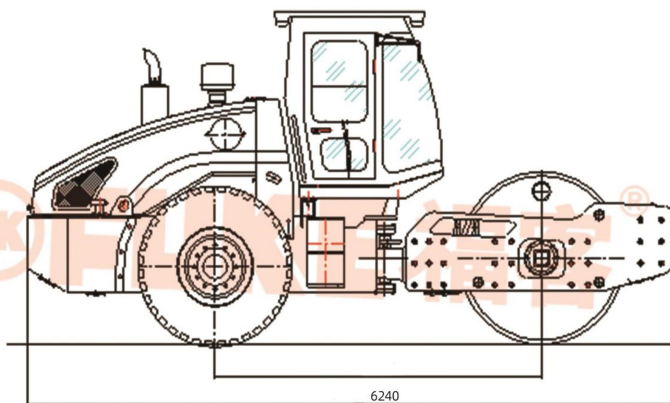

## Technical Specification

Operating weight:	16000 kg
Rolling width:	2130 mm
Activating force:	295/145 KN
Vibration frequency:	30Hz
Theoretical amplitude of vibration:	1.8/0.9mm
Travel speed:	2.5/5.0km/h
Gradeability:	30%
Diesel engine model:	WP4G110E221
Rated rotation speed:	2000 r/min
Rated power:	118kw
Overall dimensions L*W*H:	6240*2280*3080mm

★Mechanical drive three-speed gears.

★Hydraulic vibration, electronic controlled delayed starting of vibration, great exciting force with high compacting efficiency.

★Hydraulic steering, articulated frame with flexible steering and operation.

★Equipped with power shift gearbox, easy to shift gear.

★Hydraulic clamp disc service brake, mechanical drum-style parking brake, safe and reliable

\*Rear engine cover can be turned up for big angle for convenient maintenance

\*Furnished with famous brand hydraulic components with reliable performance