

FK-220D



Basic information

Model FK-220D

Operating weight:

20000kg

Gradeability:

30%

Rated power:

129KW

Rolling width:

2130mm

Activating force



395/220kn

Rated rotary speed:

2000r/min



Outline

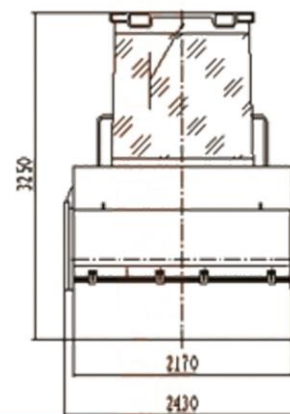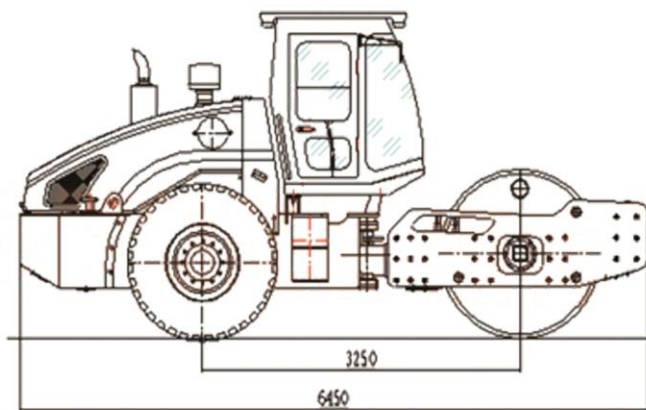

Technical Specification

Operating weight:	20000 kg
Diameter of vibrating drum:	φ 1600 mm
Rolling width :	2130 mm
Activating force:	395/220 KN
Theoretical amplitude of vibration:	1.9/0.9 mm
Vibration frequency:	30 HZ
Moving speed Range I II III IV:	2.5/5.0/10.5 km/h
Gradeability:	30%
Rated rotation speed:	2000 r/min
Rated power:	129 kw
Overall dimensions L*W*H:	6450x2430x3250 mm

★Mechanical drivethree-speed gear shift. Hydraulic vibration, start-vibration by electric control, hydraulic steering with light operation.

★TheFKseriespneumatic articulated vibratory roller can be equipped with dieselengineofWEICHA with low fuel consumption, large power which is clean and envi ronmental-friendly.

★Adoptthespecialgear-box with synchronizer, easy to operate and comfortable.

★Streamlined shape design with the whole remavable cover easy to maintenance