



Basic Information

Bucket capacity

0.6m³

Rated power

103kw

Displacement

4.1L

Loading Capacity




1500kg

Basic Parameters

Technical Specification

Outline

Engine model	WP4.1 G140E301
Borexstroke (mm)	105×118
Rated power (Kw)	103
Rpm	2200
Number of cylinders	4
Max.torque(N.m)	560
Displacement (L)	4.1
Max.Speed (km/h)	12/18
Tire (track) model	450×86
Loading Capacity(kg)	1500
Lifting	Arc-Shaped Lifting
Bucket capacity(m ³)	0.6
Rated flow(L/min)	80
Tank capacity(L)	90
Weight with bucket(kg)	4800
Height at Max. Extension (mm)	4070
Hinge Pin Height (mm)	3150
Total Height (mm)	2160
Height to bottom of bucket(mm)	2983
Overall length without bucket(mm)	3000
overall length with bucket(mm)	3700
Dumping angle at maximum height(°)	40
Dumping height(mm)	2450
Dumping reach(mm)	700
Rollback at ground position(°)	30
Rollback fully raised at max height(°)	104
Wheelbase(mm)	1500

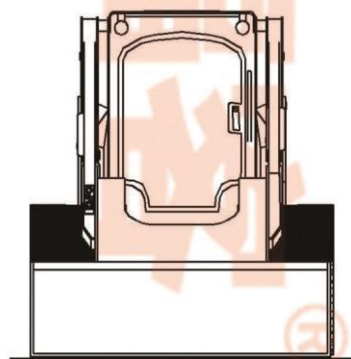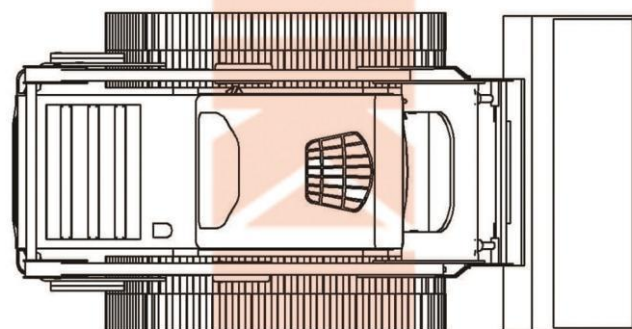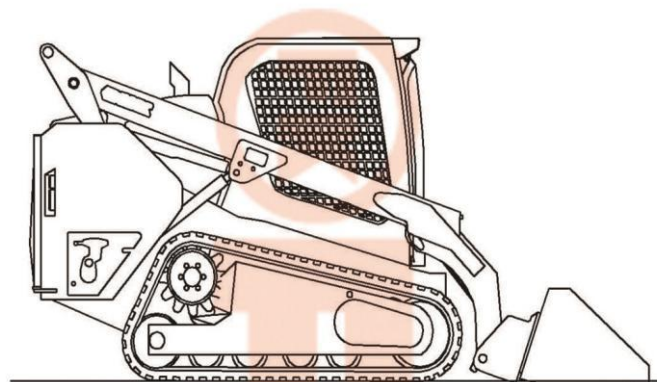

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

FUKE Skid Loader Attachments


4 in 1 bucket



Pallet fork



Dozer blade



Snow blade



Grapple bucket



Fork grapple



Backhoe



Backhoe arm



Sweeper



Angle Broom



Breaker



Planer



Trencher



Auger



Vibratory roller



Disk type trencher



Mixer



Snow Blower



*We follow the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

FUKE

Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:
Phone/Whatsapp: +8613505697380
Email: fk002@fukebn.com / fuke7380@gmail.com