

**FK FUKU 福客®**

**FK18-9**

**Boutique Manufacturing  
Conquer the word with Quality**




# FK18-9

Total Weight: 1700 kg

Standard bucket capacity: 0.05 m<sup>3</sup>

Rated power: 13.3/2200 kW/rpm

- New generation product
- Exquisite
- Reliable structure
- Excellent performance
- Small and efficient
- Convenient maintenance
- Cost-effective

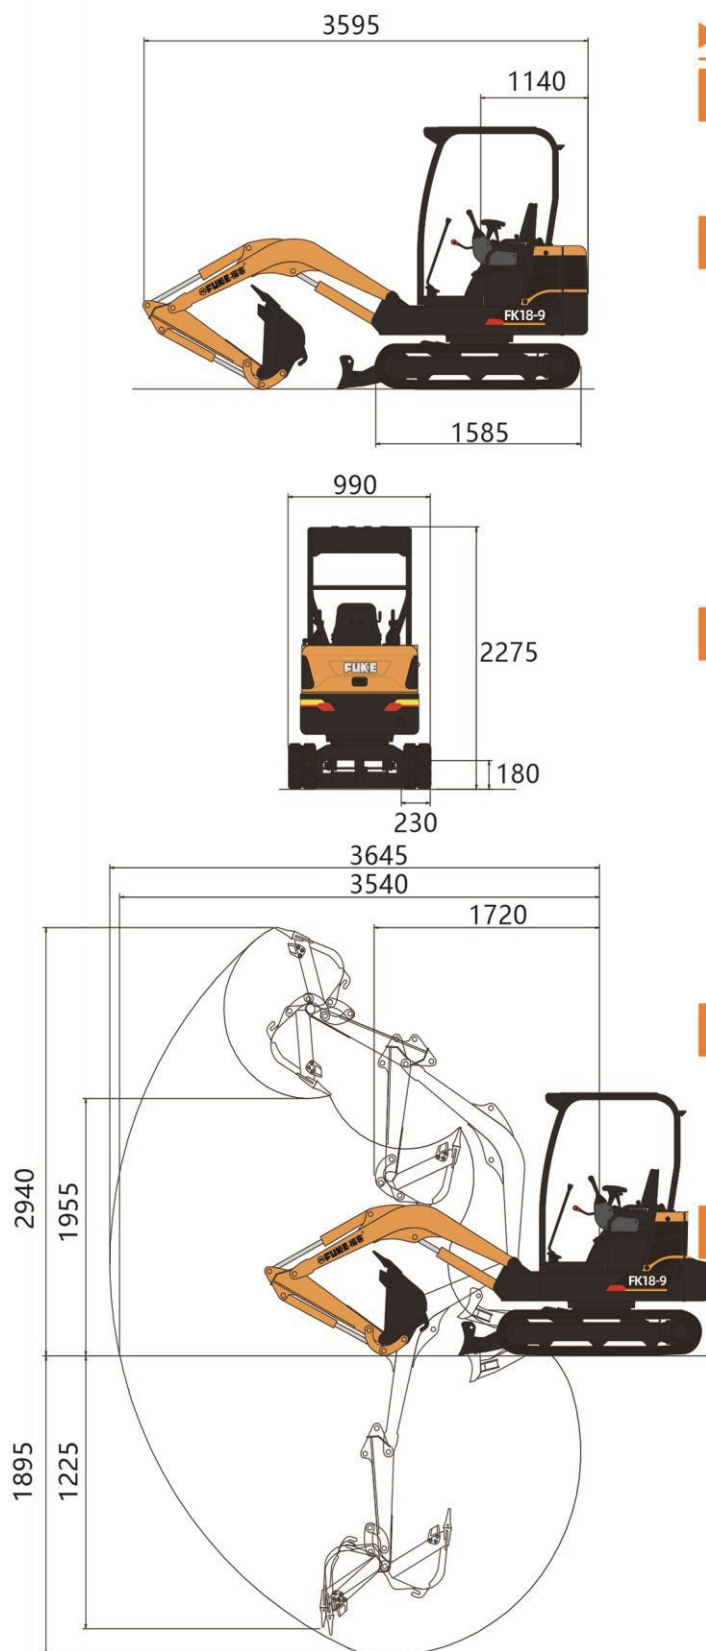

## ► Technical specifications

### Basic parameters

|                          |                     |
|--------------------------|---------------------|
| Total Weight             | 1700 kg             |
| Standard bucket capacity | 0.05 m <sup>3</sup> |

### Performance parameter

|                                |                  |
|--------------------------------|------------------|
| Engine                         | Yanmar           |
| Engine rated power             | 13.3/2200 kW/rpm |
| Gradeability                   | 30 °             |
| Maximum digging force of stick | 8 kN             |
| Bucket excavation              | 12.5 kN          |
| Driving speed                  | 2.2 km/h         |
| Platform rotation speed        | 9-11 rpm         |

### Job parameters

|                                  |         |
|----------------------------------|---------|
| Maximum digging height           | 2940 mm |
| Maximum digging depth            | 1895 mm |
| Maximum digging radius           | 3645 mm |
| Maximum ground excavation radius | 3540 mm |
| Maximum unloading height         | 1955 mm |
| Minimum radius of gyration       | 1720 mm |
| Maximum vertical digging depth   | 1225 mm |

### Transport size

|                                  |         |
|----------------------------------|---------|
| Overall length (transport state) | 3595 mm |
| Overall width (transport state)  | 990 mm  |
| Overall height (transport state) | 2275 mm |

### Other parameters

|                               |         |
|-------------------------------|---------|
| Track width                   | 990 mm  |
| Track length                  | 1585 mm |
| Track shoe width              | 230 mm  |
| Minimum ground clearance      | 180 mm  |
| Balance weight off the ground | 460 mm  |
| Radius of tail gyration       | 1140 mm |
| Fuel tank capacity            | 20 L    |
| Hydraulic oil tank capacity   | 22 L    |

**安徽福客重工设备有限公司**  
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp: +8613505697380

Email: fk002@fukebn.com/fuke7380@gmail.com

\*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.