
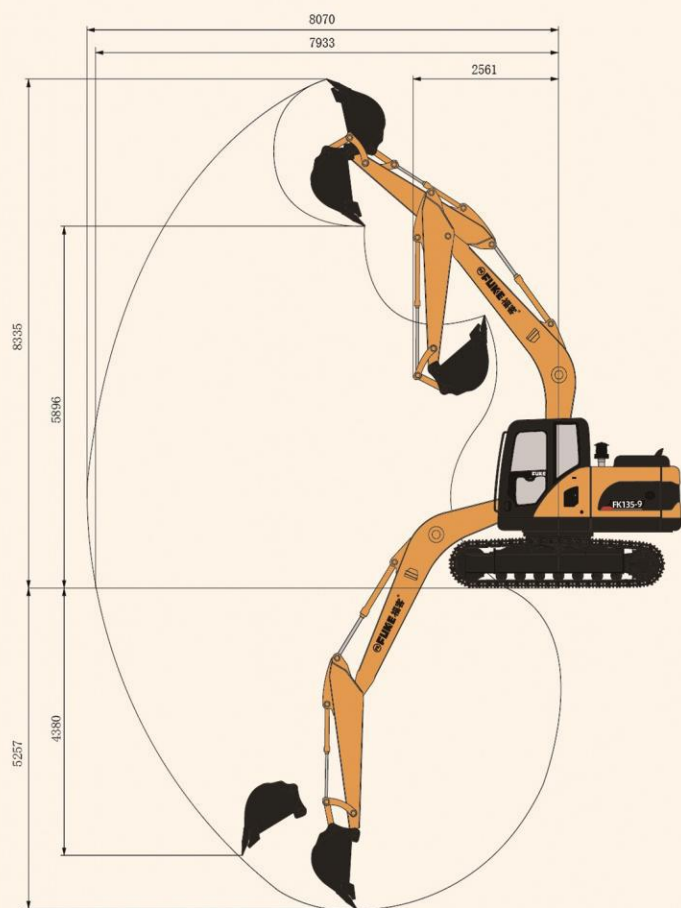



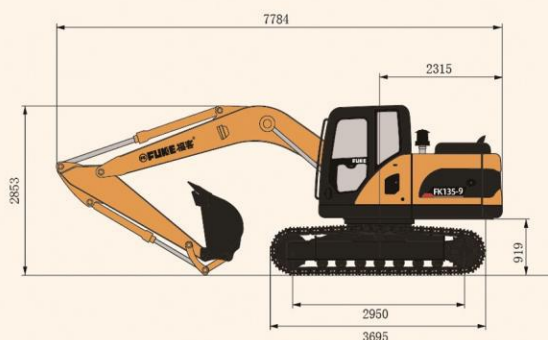

► Technical specifications

Basic parameters

Total Weight	13800 kg
Standard bucket capacity	0.52 m ³
Standard bucket width	934 mm

Performance parameter

Engine	Cummins
Engine rated power	86/2200 kW/rpm
Gradeability	35 °
Maximum digging force of stick	75.8 kN
Maximum digging force of bucket	106 kN
Driving speed	3.1/5.0 km/h
Main traction force	121 kN
Platform rotation speed	11 rpm

Job parameters

Maximum digging height	8335 mm
Maximum digging depth	5257 mm
Maximum digging radius	8070 mm
Maximum ground excavation radius	7933 mm
Maximum unloading height	5896 mm
Minimum radius of gyration	2561 mm
Maximum vertical digging depth	4380 mm

Transport size

Overall length (transport state)	7784 mm
Overall width (transport state)	2530 mm
Overall height (transport state)	2853 mm

Other parameters




Track width	2500 mm
Track length	3695 mm
Track shoe width	500 mm
Minimum ground clearance	415 mm
Balance weight off the ground	919 mm
Radius of tail gyration	2315 mm
Track wheelbase	2950 mm
Fuel tank capacity	270 L
Hydraulic oil tank capacity	105 L

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp: +8613505697380

Email: fk002@fukebn.com/fuke7380@gmail.com

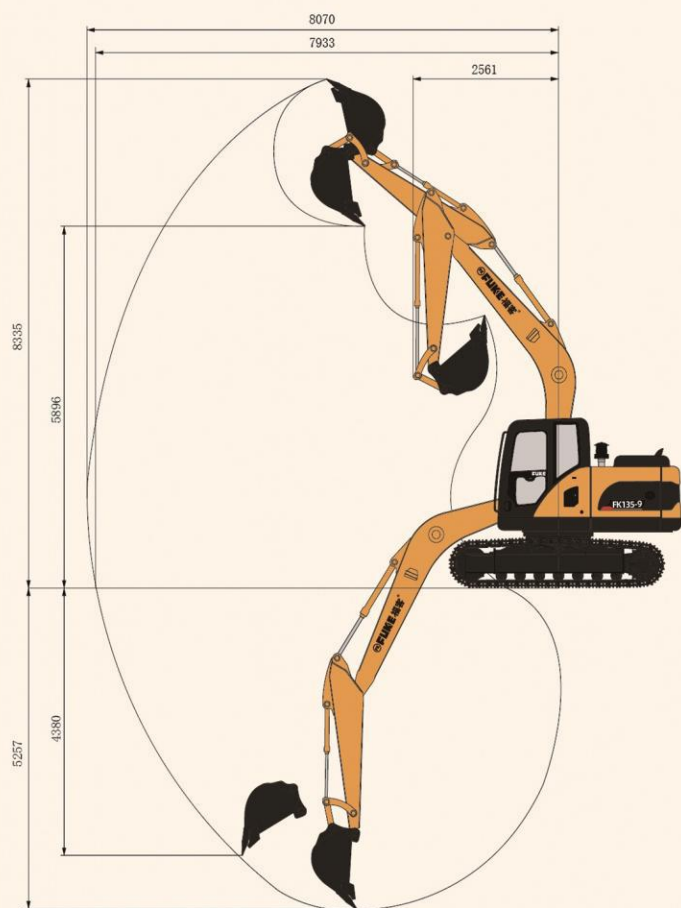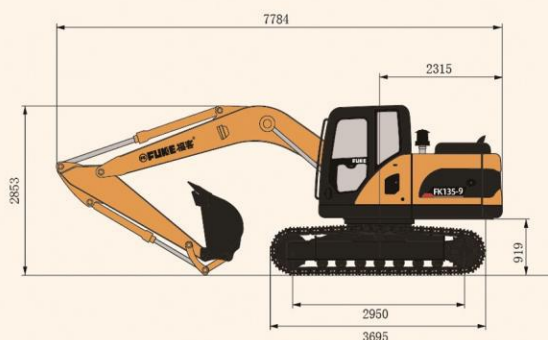

► Technical specifications

Basic parameters

Total Weight	13800 kg
Standard bucket capacity	0.52 m ³
Standard bucket width	934 mm

Performance parameter

Engine	Cummins
Engine rated power	86/2200 kW/rpm
Gradeability	35 °
Maximum digging force of stick	75.8 kN
Maximum digging force of bucket	106 kN
Driving speed	3.1/5.0 km/h
Main traction force	121 kN
Platform rotation speed	11 rpm

Job parameters

Maximum digging height	8335 mm
Maximum digging depth	5257 mm
Maximum digging radius	8070 mm
Maximum ground excavation radius	7933 mm
Maximum unloading height	5896 mm
Minimum radius of gyration	2561 mm
Maximum vertical digging depth	4380 mm

Transport size

Overall length (transport state)	7784 mm
Overall width (transport state)	2530 mm
Overall height (transport state)	2853 mm

Other parameters

Track width	2500 mm
Track length	3695 mm
Track shoe width	500 mm
Minimum ground clearance	415 mm
Balance weight off the ground	919 mm
Radius of tail gyration	2315 mm
Track wheelbase	2950 mm
Fuel tank capacity	270 L
Hydraulic oil tank capacity	105 L

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp: +8613505697380

Email: fk002@fukebn.com/fuke7380@gmail.com