

FK FUKU 福客®

FUKE

**Boutique Manufacturing
Conquer The World With Quality**

FK230-9

进 取 不 止


FK230-9

Total Weight: 23100 kg

Standard bucket capacity: 1.08 m³

Rated power: 124/2050 kW/rpm

- New generation products
- National Three Emissions
- Advanced hydraulic system
- Efficient leveling ability
- Durable metal cover
- Safe and comfortable cab
- Convenient maintenance

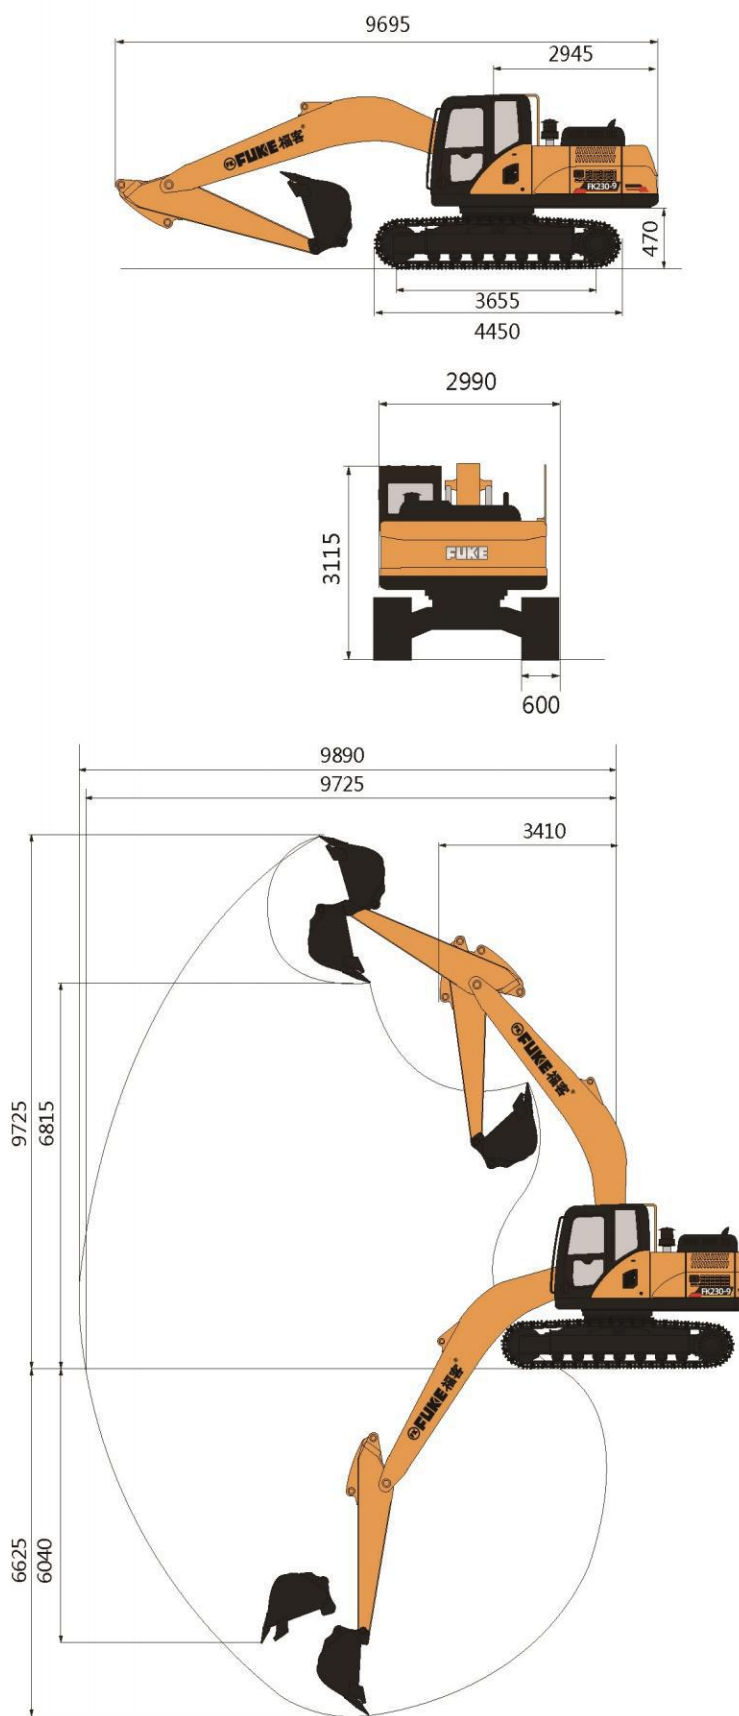

► Technical specifications

Basic parameters

Total Weight	23100 kg
Standard bucket capacity	1.08 m ³
Standard bucket width	134 mm

Performance parameter

Engine	Cummins
Engine rated power	124/2050 kW/rpm
Gradeability	35 °
Maximum digging force of stick	102 kN
Maximum digging force of bucket	139.3 kN
Driving speed	3.4/5.2 km/h
Main traction force	> 121 kN
Platform rotation speed	13-15 rpm

Job parameters

Maximum digging height	9725 mm
Maximum digging depth	6625 mm
Maximum digging radius	9890 mm
Maximum ground excavation radius	9725 mm
Maximum unloading height	6815 mm
Minimum radius of gyration	3410 mm
Maximum vertical digging depth	6040 mm

Transport size

Overall length (transport state)	9695 mm
Overall width (transport state)	2990 mm
Overall height (transport state)	3115 mm

Other parameters

Track width	2990 mm
Track length	4450 mm
Track shoe width	600 mm
Minimum ground clearance	470 mm
Balance weight off the ground	1070 mm
Radius of tail gyration	2945 mm
Track wheelbase	3655 mm
Fuel tank capacity	350 L
Hydraulic oil tank capacity	210 L

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com