



FUKE

FK800-9



FK800-9

Total Weight: 85000 kg

Standard bucket capacity: 5 m³

Rated power: 375/1800 kW/rpm

- New generation product
- Exquisite
- Reliable structure
- Excellent performance
- Small and efficient
- Convenient maintenance
- Cost-effective




安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp: +8613505697380

Email: fk002@fukebn.com / fuke7380@gmail.com

*We follow the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

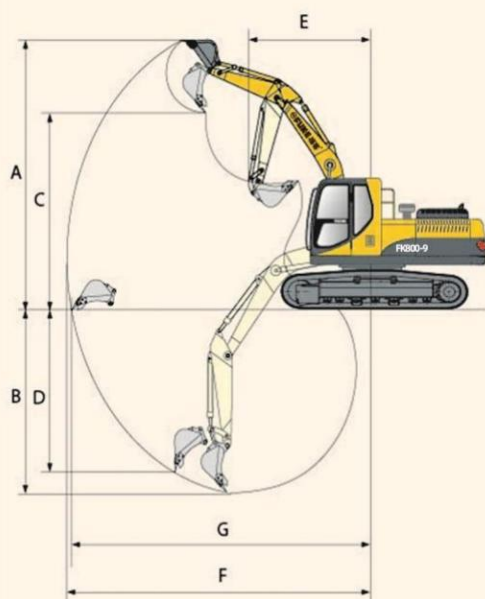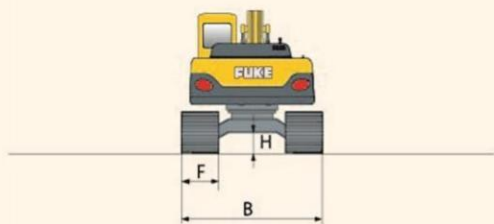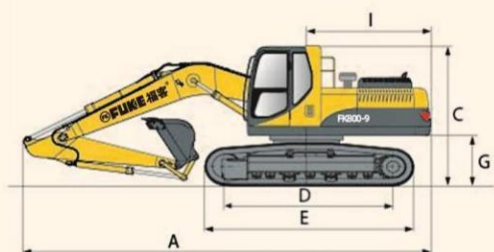

► Technical specifications

Basic parameters

Total Weight	85000 kg
Standard bucket capacity	5 m ³

Performance parameter

Engine	Cummins
Engine rated power	375/1800 kW/rpm
Fuel tank volume	1250 L
Traveling speed (high/low)	4.6/2.8 km/h
Rotation speed	7.1 r/min
Climbing capacity	35/70%
Grounding specific pressure	489 kpa

Job parameters

Counterweight clearance from the ground	1525 mm
Tail turning radius	5090 mm
Track ground length	4730 mm
Track length	5975 mm
Track gauge	2760 mm
Track width	3400/4000 mm
Track plate width	

Transport size

Overall length (transport state)	18200 mm	A
Overall width (transport state)	3560 mm	B
Overall height (transport state)	3515 mm	C

Other parameters

Turntable width(mm)	3830
Bucket bar length(mm)	10
Length of moving arm(mm)	6
Bucket digging force (KN) ISO	341
Bucket digging force (KN) ISO	307
Hydraulic pump model	K3V280
Maximum flow rate	436×2
Working pressure	31.4(32.3)

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.