

FK-CHJ40T



Basic information






Model **FK-CHJ40T**





Technical Specification

Engine standard:	Yuchai (optional Cummins)
Tyre wheel:	1100-420/1300-320 solid
Spreader:	telescopic 20'/40'
Travelling motor:	Danfoss
Limit switch:	CHINT
Fuse Terminals, Terminal Blocks:	WAGO
Intermediate relay :	OMRON
High current relay:	CHINT
Control mechainsm:	SYMC
Monitor system:	WECON
Dimensions(LxWxH):	7100x5200x6100mm
Inner width:	3200mm
Min. turning radius:	7500mm
Lateral movement range:	±200mm
Dead weight about:	24 ton
Load capacity:	40 ton
Air-conditioning:	Cold and warm
Solenoid directional valve:	Vickers
Main working multiple directional valve:	YOULI
Traveling closed pump:	HYTEK
Complete machine connector:	Amphenol

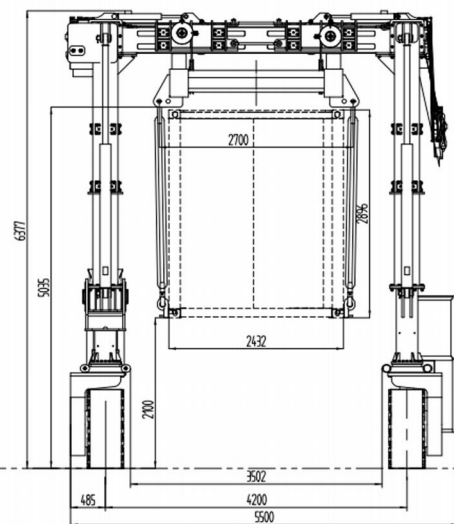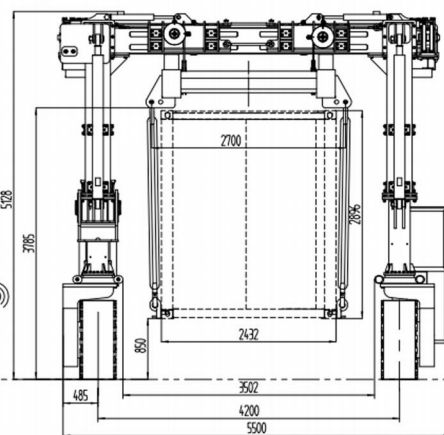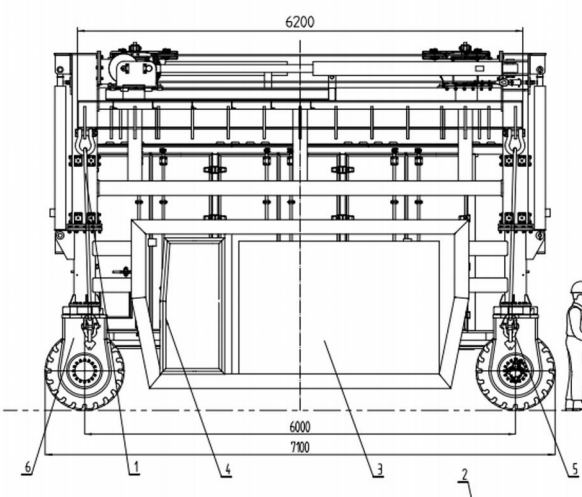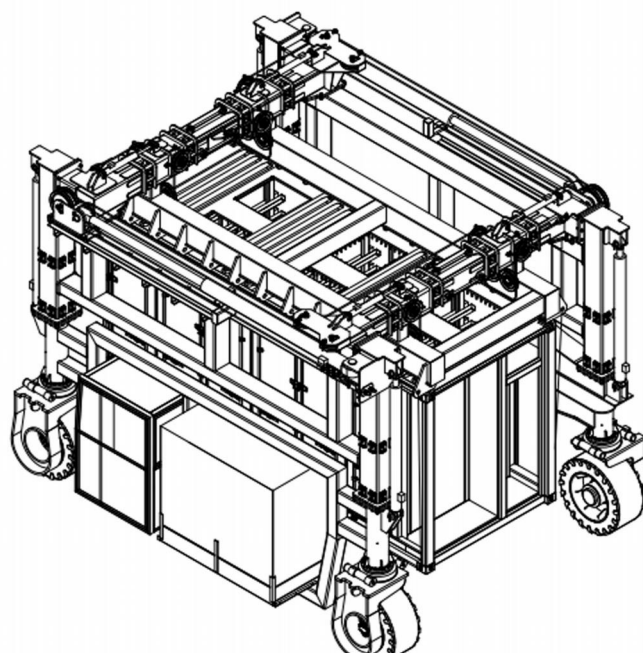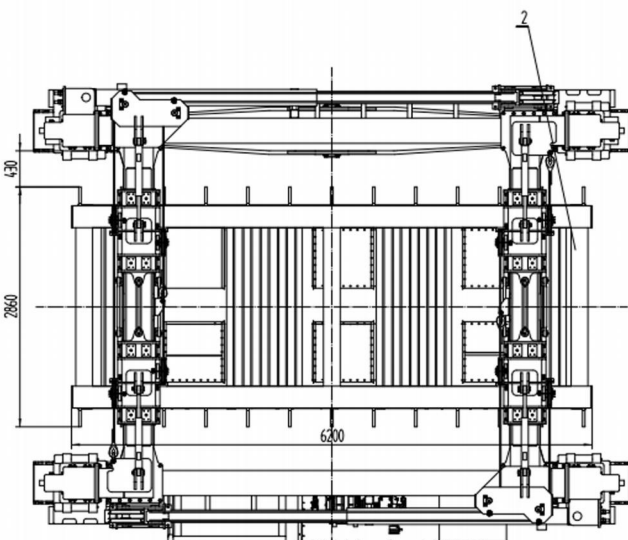

Parameters of tire transporter (automatic telescopic spreader)

Engine standard:	Yuchai (optional Cummins)
Tyre wheel:	1100-420/1300-320 solid
Spreader:	telescopic 20'/40'
Travelling motor:	Danfoss
Limit switch:	CHINT
Fuse Terminals, Terminal Blocks:	WAGO
Intermediate relay :	OMRON
High current relay:	CHINT
Control mechainsm:	SYMC
Monitor system:	WECON
Dimensions(LxWxH):	7100x5200x6100mm
Inner width:	3200mm
Min. turning radius:	7500mm
Lateral movement range:	±200mm
Dead weight about:	24 ton
Load capacity:	40 ton
Air-conditioning:	Cold and warm
Solenoid directional valve:	Vickers
Main working multiple directional valve:	YOULI
Traveling closed pump:	HYTEK
Complete machine connector:	Amphenol



whatsapp:+8613505697380

mail:fuke7380@gmail.com