



Modle **FK-G550**

Working weight
55000KG

Engine Model
Cummins

Engine power
252kw

Engine speed
2200rpm

► Technical specifications

Basic parameters

Total Weight	45000kg
Standard bucket capacity	1.43 m ³

Performance parameter

Engine	Cummins
Engine rated power	186/252.9 kW/ps
Gradeability	35 °
Maximum digging force of stick	128 kN
Bucket excavation	175 kN
Driving speed	3.1-5.2 km/h
Platform rotation speed	10-11 rpm

Job parameters



Maximum digging height	10190 mm	A
Maximum digging depth	7305 mm	B
Maximum unloading height	7165 mm	C
Maximum vertical digging distance	5745 mm	D
Minimum radius of gyration	3825 mm	E
Maximum digging distance	10620 mm	F
Maximum ground excavation distance	10420 mm	G

Transport size

Overall length (transport state)	10795 mm	A
Overall width (transport state)	3260 mm	B
Overall height (transport state)	3160 mm	C

Other parameters

Bucket width	1463 mm	
Wheelbase	4030 mm	D
Track length	4961 mm	E
Track width	600 mm	F
Counterweight ground clearance	1244 mm	G
Minimum ground clearance	530 mm	H
Radius of tail gyration	3308 mm	I

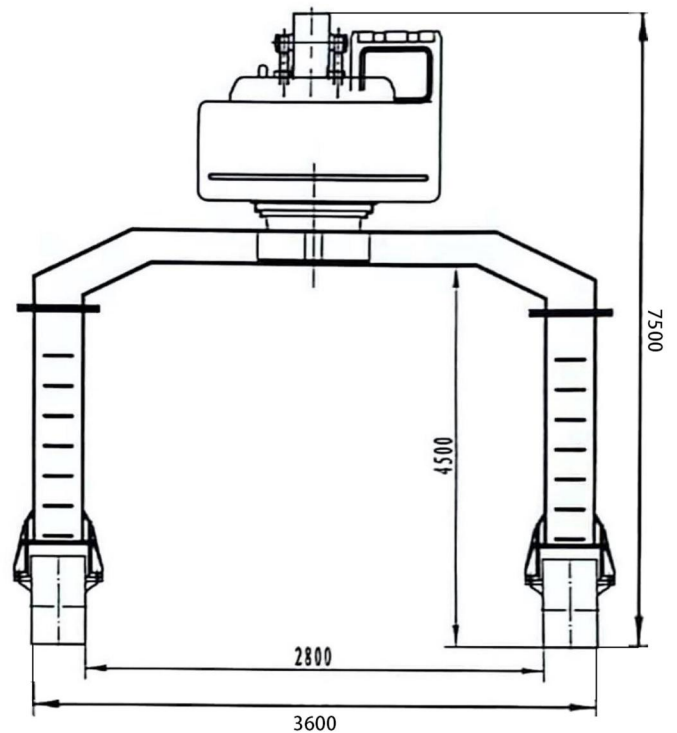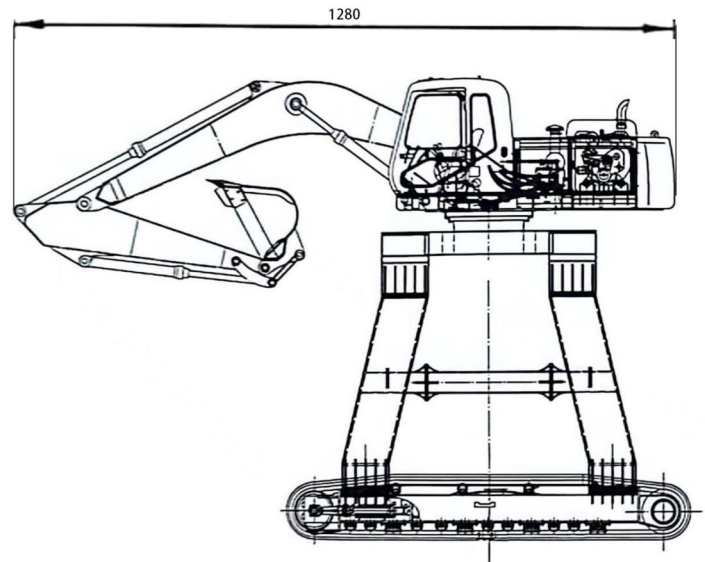

安徽福客重工有限公司
Anhui Fuke Heavy Industry Co., Ltd.

website: www.sfuke.com

whatsapp: +8613505697380

Address: Room 405, Building B-4, East Side of Dazhong Road, Cuozen Town, Feidong County, Hefei City, Anhui Province

whatsapp: +8613505697380 wed: www.sfuke.com